The New LITTLE WONDER® Hydro Brush Cutter

WITH YOU THROUGH THICK AND EVEN THICKER

Solid Rods
connect the operator to the transmission, park brake, and cutter blade clutch—no cables to break or adjust.

Durable, Honda® GXV390 Engine

7-,10- and 12-Gauge Welded Steel
engine base, cutting deck, rear frame and control handle construction holds up to the toughest conditions.

Speed Limiter Dial
allows a firm grip on the control handles right from the start and speed selection while on the go.

Hydrostatic Transmission
offers infinitely-variable, clutch-less speed selection—up to 4.2 mph forward and 1.7 mph reverse.

LITTLE WONDER®

Professionals Demand Little Wonder.™

The New **LITTLE WONDER®** Hydro Brush Cutter navigates through weeds, heavy brush and overgrown vegetation with ease. Our welded steel frame design and engine positioning provide excellent balance regardless of the terrain. And unlike the competition, our hydrostatic transmission offers infinitely-variable, clutch-less speed selection—up to 4.2 mph forward and 1.7 mph reverse. So you can cut your own path at your own pace.

Solid rods connect the operator to the transmission, park brake and cutter blade clutch—no cables to break or adjust.

16-inch bar tread tires are foam filled to prevent leaks and provide excellent traction and ground clearance on rough terrain.

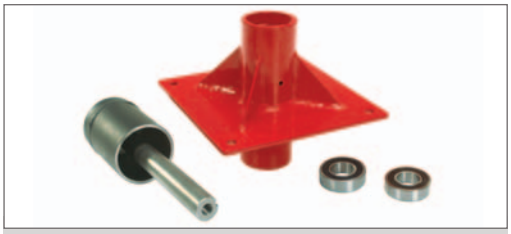

1-inch diameter spindle is supported by top and bottom sealed ball bearings inside a machined steel hub, a heavy-duty welded outer steel flange and a grease fitting to prevent the induction of moisture.

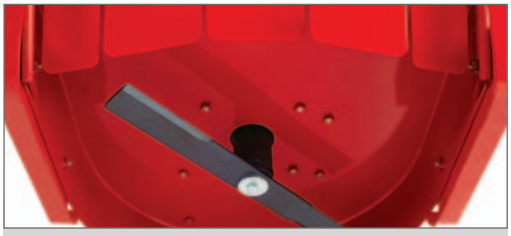

2.5 inches wide, .25-inch plate steel construction skid shoes are adjustable and provide excellent flotation over rough terrain. 10-gauge welded steel deck provides a rugged and deep chamber to cut and chop thick brush.

MODEL NUMBER	BRC-24 Hydro
ENGINE	Honda® GXV390
ENGINE TYPE	Air-cooled 4-stroke OHV
DISPLACEMENT	390 cc
ENGINE CYLINDERS	1
IGNITION	Recoil Start
FUEL CAPACITY	2.2 US Quarts (2.1 Liters)
TRANSMISSION	Hydro-Gear® T2® Transaxle
TRANSMISSION TYPE	Integrated Hydrostatic Pump/Motor
AXLE	.75" Solid Steel
PARK BRAKE	Standard
DIFFERENTIAL LOCK	Limited Slip
GROUND SPEED	
FORWARD	Infinitely-variable, 0-4.2 mph
REVERSE	Infinitely-variable, 0-1.7 mph
DIMENSIONS	
CUTTING BLADE	24" (.25" Thick)
SPINDLE	1" Diameter
SPINDLE BEARINGS	Dual Sealed Ball Bearings
OVERALL WIDTH	28" (32" at the Handles)
CUT HEIGHT	3.25" - 4.75"
TIRES	16 x 4.8-8 Bar Tread, Foam Filled Standard
UNIT WEIGHT	365 lbs.
WARRANTY	
UNIT	2-Year Commercial and Rental Use
ENGINE	3-Year Manufacturer

LITTLE WONDER®

Professionals Demand Little Wonder.™

1028 Street Road • Southampton, PA 18966
1-877-596-6337 • www.littlewonder.com

© Copyright 2011 Schiller Grounds Care, Inc. All Rights Reserved. The power ratings are provided by the manufacturer. Actual power output is dependent on many factors including engine rpm, air density and engine condition. For further information on horse power, please contact Customer Service at 1-877-596-6337.